




**ULTRATECH**  
THE QUALITY ENGINEERS

◆ **Flexible & Highly Flexible**  
◆ **Braided Connectors** ◆ **Earthing Tapes**



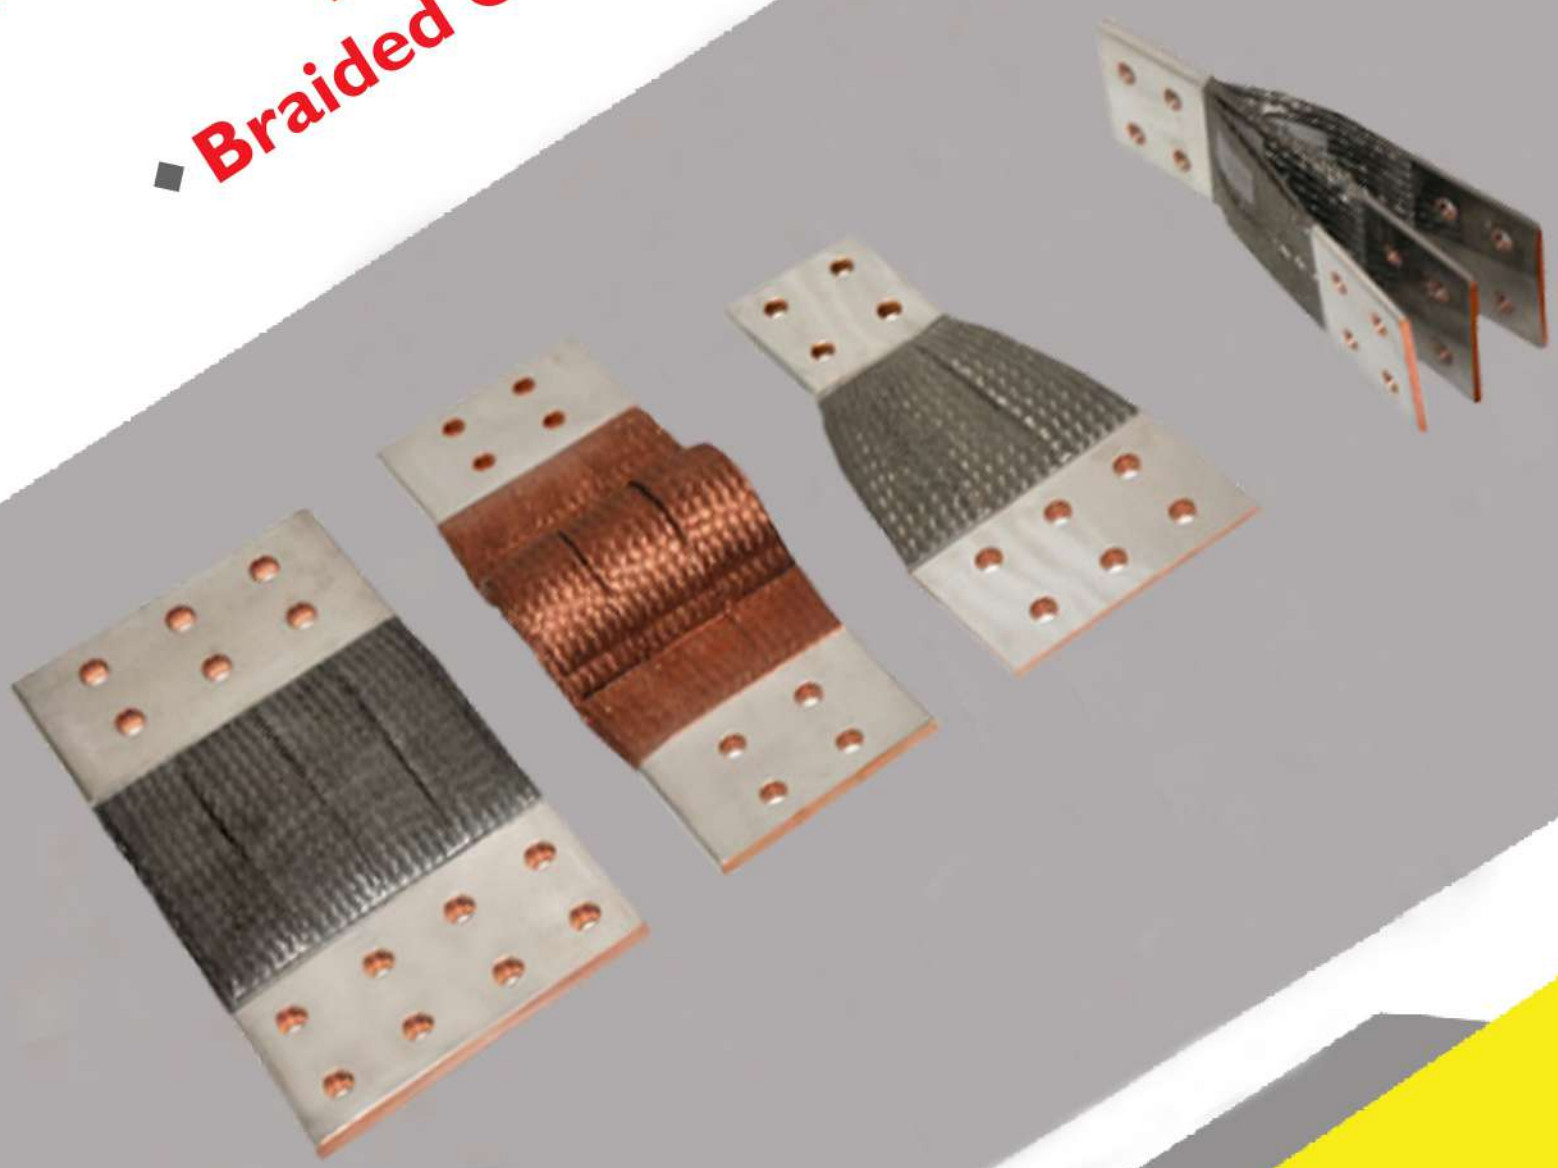

**ULTRATECH**  
THE QUALITY ENGINEERS

ULTRATECH manufactures a wide range of flexible & highly flexible braided connectors and earthing tapes for transmission of lower to higher amperage electrical currents. Connectors designed to compensate Vibration, heat expansion and contraction for Busses. They delivers maximum amount of power with minimum resistance values maintaining peak efficiency.

## Technical Data

### Braids

- Made out of annealed Cu-ETP wires.
- Copper wires uncoated is standard, tin or silver coated on request.
- Wire  $\varnothing$  0.07mm -0.20mm.

### Contact area

- Seamless Cu- ETP tube
- Contact area uncoated tin, hot dipped tin & silver coated on request.

### Insulation


- Heat Shrinking tubes, silicon, PVC on request.

### Features

- Current capacity from 10 Amps to 6300 Amps available in different configuration.
- Available in flat flexible strip / Round flexible rope & stranded conductors.
- Single or multiple cable termination possible


### Typical application

- Switchgear Panels , Power generation & Transmission
- Solar Energy , Wind Energy
- Rail Boards , Defence
- Electrolytic process , Welding Industry , Electro Plating Industry
- Custom designed and engineered to customers satisfaction

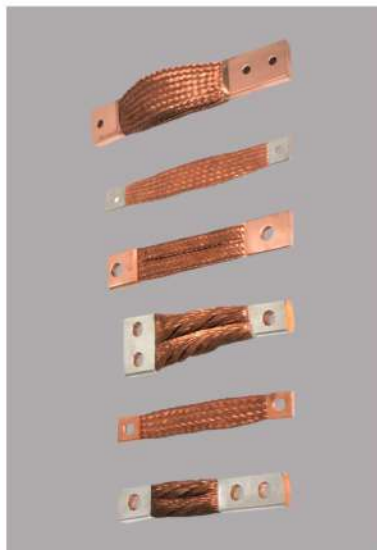



## Selection Form for Flexible Braided Connectors

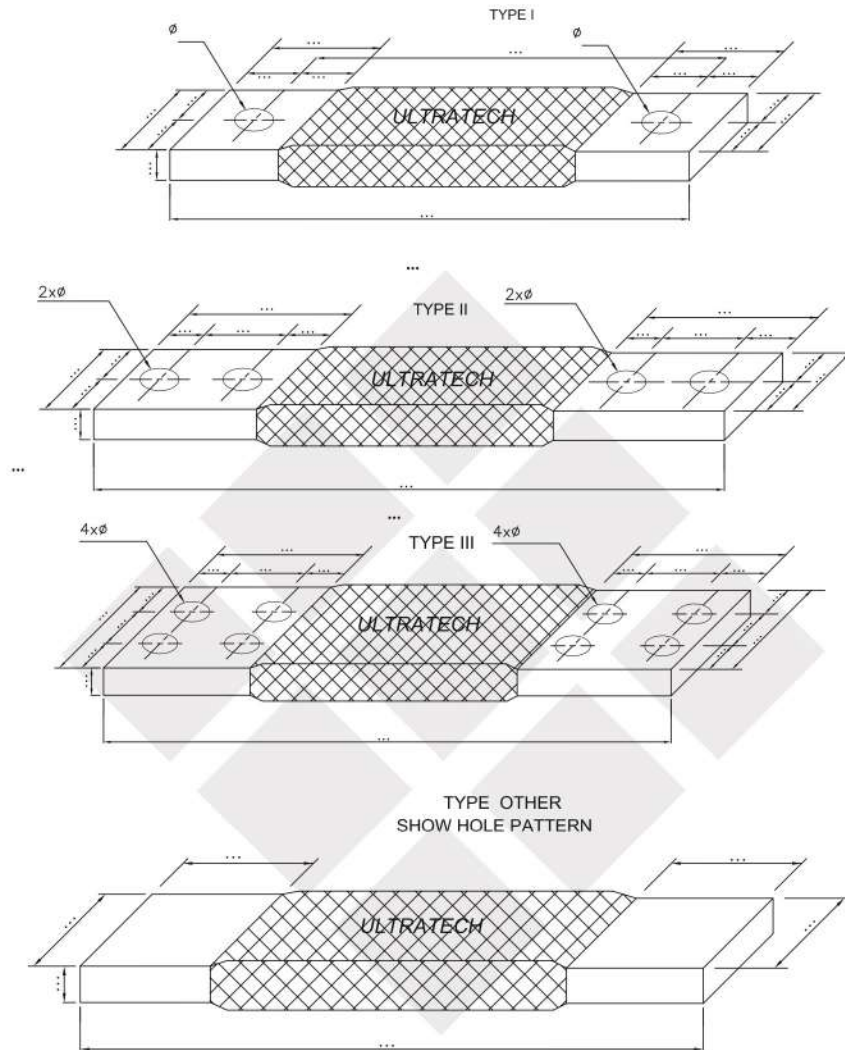

### Technical Specification

Cross section area	
Single wire diameter	
Layers of braid	
Amp. rating	
Finish of braid	<input type="checkbox"/> Un coated Copper wire <input type="checkbox"/> Tin coated copper wire <input type="checkbox"/> Silver coated copper wire.
Finish of contact area	<input type="checkbox"/> Un coated copper <input type="checkbox"/> Tin coated <input type="checkbox"/> Silver coated <input type="checkbox"/> Hot Dipped tinned coated
Any special requirement	
Quantity	
Delivery time needed	

### Contact Details

Attn to Mr/Mrs.	
Company Name	
Address	
Tele No.	Email ID: